

Which Sheet Flooring?

JANUARY 2010

Carter Holt Harvey® Woodproducts offers a range of easy to install flooring substrate systems to suit almost any flooring project.

WHY USE KOPINE ULTRALOCK®?


- Extremely cost effective particleboard flooring system for use in internal dry applications
- The unique edge gluing system (on long edges) requires no support nogs or dwangs in most cases saving time and money
- Compared to conventional tongue and groove particle systems Ultralock's unique glued edge offers superior joint shear strength and increased water resistance.
- Edges can be glued in wet weather
- May be exposed to weather for up to 8 weeks during construction

WHY USE ECOPLY® FLOORING?

- Ecoply plywood flooring offers superior span, strength and durability compared to particleboard and most other flooring substrate systems
- Compared to 20mm particleboard, 19mm Ecoply Longspan Flooring is:
 - Over two times stiffer and deflects less than half as much on joists fixed at 600mm centres
 - At 600mm joist centres 19mm Ecoply Longspan achieves equivalent floor performance to 20mm particleboard at 450mm centres
 - Up to 20% lighter than particleboard



FLOORING SELECTION GUIDE

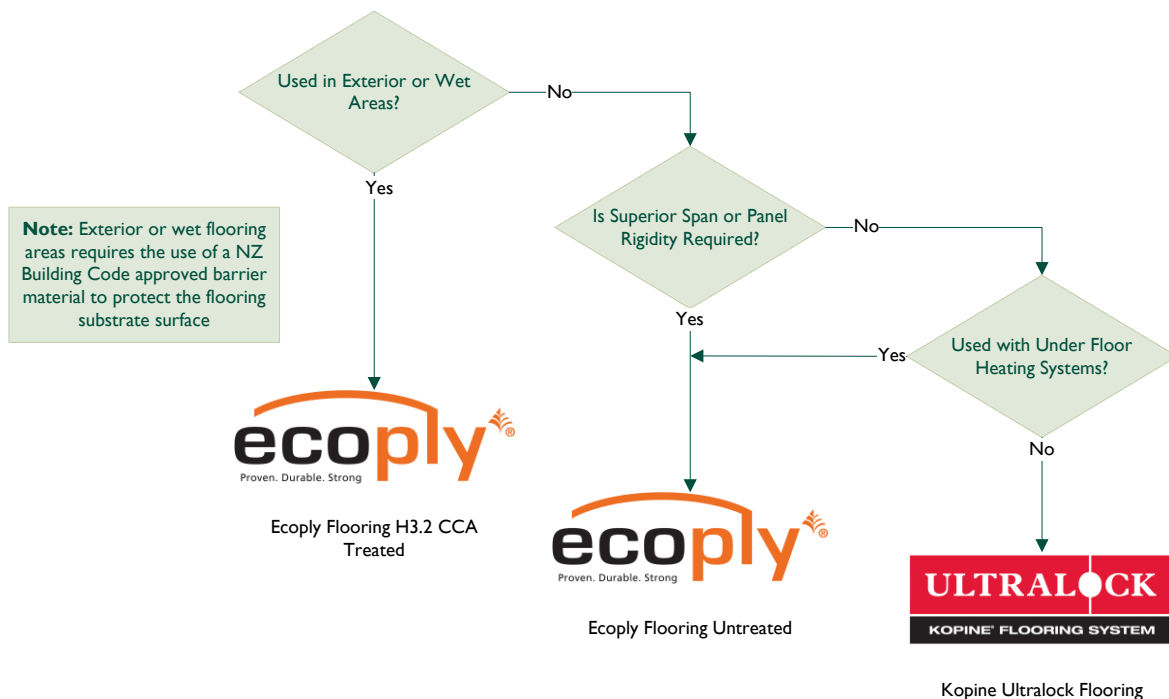

MORE INFORMATION

For more information and product literature on Ecoply and Kopine Ultralock flooring visit www.ecoply.co.nz and www.kopine.co.nz or contact customer services on 0800 326 759.

Information contained above is a general guide only. For more information and product literature on Ecoply and Kopine Ultralock flooring visit www.ecoply.co.nz and www.kopine.co.nz or contact customer services on 0800 326 759